

This Preliminary Amendment includes an attachment entitled "Version With Markings To Show Changes Made."

It is respectfully requested that this Preliminary Amendment be entered in the above-referenced application.

If there are any additional fees associated with filing of this Preliminary Amendment, please charge the same to our Deposit Account No. 19-3935.

Respectfully submitted,

STAAS & HALSEY LLP

Date: 1/25/02

By: John H. Stowe
John H. Stowe
Registration No. 32,863

700 Eleventh Street, NW, Suite 500
Washington, D.C. 20001
(202) 434-1500

10054304-012002

VERSION WITH MARKINGS TO SHOW CHANGES MADE

IN THE SPECIFICATION:

Please AMEND the paragraph beginning at page 36 line 7, as follows:

When lit with a constant brightness, a ratio among the illumination times of the LEDs 11R, 11G, and 11B is set, in consideration of the photosensitivity of the photographic paper 8 to each color, to, for example, $\text{LED 11B} : \text{LED 11G} : \text{LED 11R} = [1:2:5-6] \text{ } 1:2:X$, where X is in a range including 5 and 6. By illuminating the LEDs 11R, 11G, and 11B at such a ratio, red light, which is most prone to insufficient light quantity, can be supplemented, and good printing processing can be performed.

Please AMEND the paragraph beginning at page 36 line 16, as follows:

Incidentally, when illumination time is constant, the foregoing ratio may be a ratio of brightness of the respective LEDs. Accordingly, the number of LEDs is not limited to the 12 used in the present embodiment, and may be determined, within the limits of the space for installation, such that the product of LED brightness and illumination time for blue, green, and red fulfills the ratio $[1:2:5-6] \text{ } 1:2:X$, where X is in a range including 5 and 6.

Please AMEND the paragraph beginning at page 68 line 11, as follows:

When lit with a constant brightness, a ratio among the illumination times of the LEDs 61R, 61G, and 61B is set to, for example, $\text{LED 61B} : \text{LED 61G} : \text{LED 61R} = [1:2:5-6] \text{ } 1:2:X$, where X is in a range including 5 and 6. By illuminating the LEDs 61R, 61G, and 61B at such a ratio, red light, which is most prone to insufficient light quantity, can be supplemented, and overall good scanning can be performed.

Please AMEND the paragraph beginning at page 68 line 18, as follows:

Incidentally, when illumination time is constant, the foregoing ratio may be a ratio of brightness of the respective LEDs. Accordingly, the number of LEDs is not limited to the 12 used in the present embodiment, and may be determined, within the limits of the space for installation, such that the product of LED brightness and illumination time for blue, green, and red fulfills the ratio $[1:2:5-6] \text{ } 1:2:X$, where X is in a range including 5 and 6.

Please AMEND the paragraph beginning at page 100 line 13, as follows:

Incidentally, the numbers of LEDs provided in the LED groups 81 and 82 are not limited to those explained in the present embodiment, and may be determined, within the limits of the space for installation, such that the product of LED brightness and illumination time for red, green, and blue fulfills the ratio [5-6:2:1] X:2:1, where X is in a range including 5 and 6.

100 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

ABSTRACT OF THE DISCLOSURE

b A film scanner useful in a digital printing system. A first light source projects light onto film which holds an original image. A scanner registers an image corresponding to the original image by scanning light transmitted through the film. Insufficient light quantity caused by irregularities in the surface of the film is compensated. The compensation is preferably provided in a domain on a side of the film opposite the scanner. The compensation may be provided by a second light source having a plurality of light emitters having different respective spectral characteristics. Light quantity of the second light source is adjustable. Preferably the light emitters of the first light source have directivity in a plurality of directions intersecting with a light axis from the first light source to the scanner and the directivity of the light emitters is adjustable.

10054904-012503

FIG. 11(a)

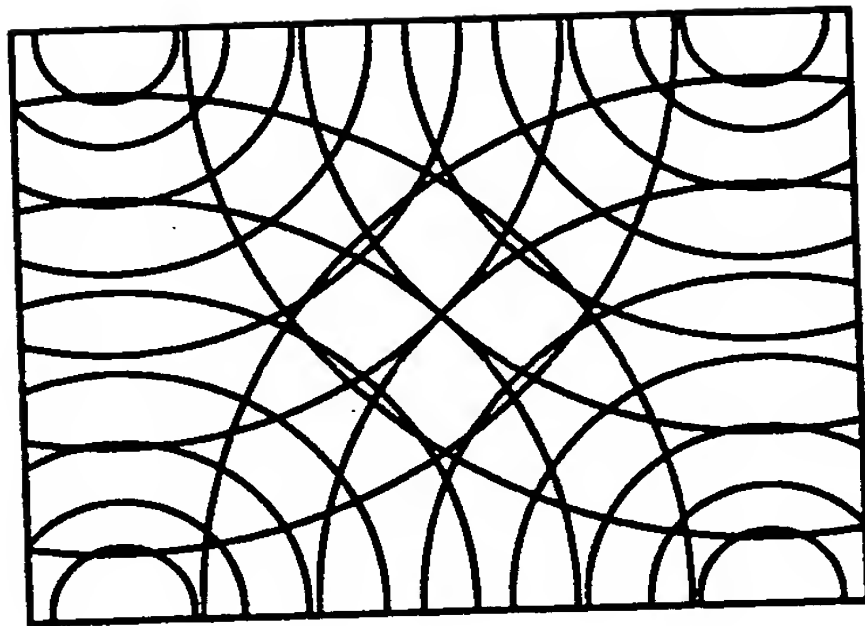


FIG. 11(b)

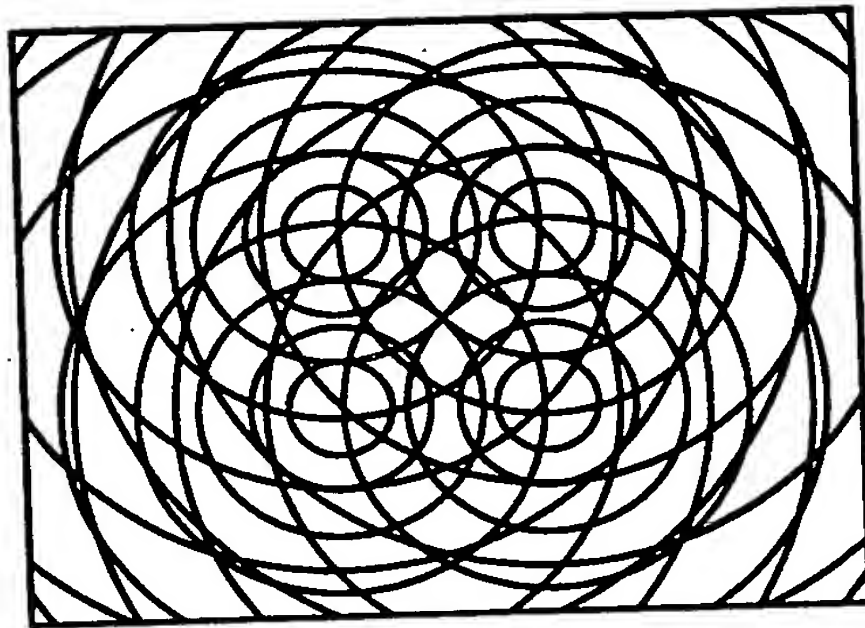


FIG.12 (a)

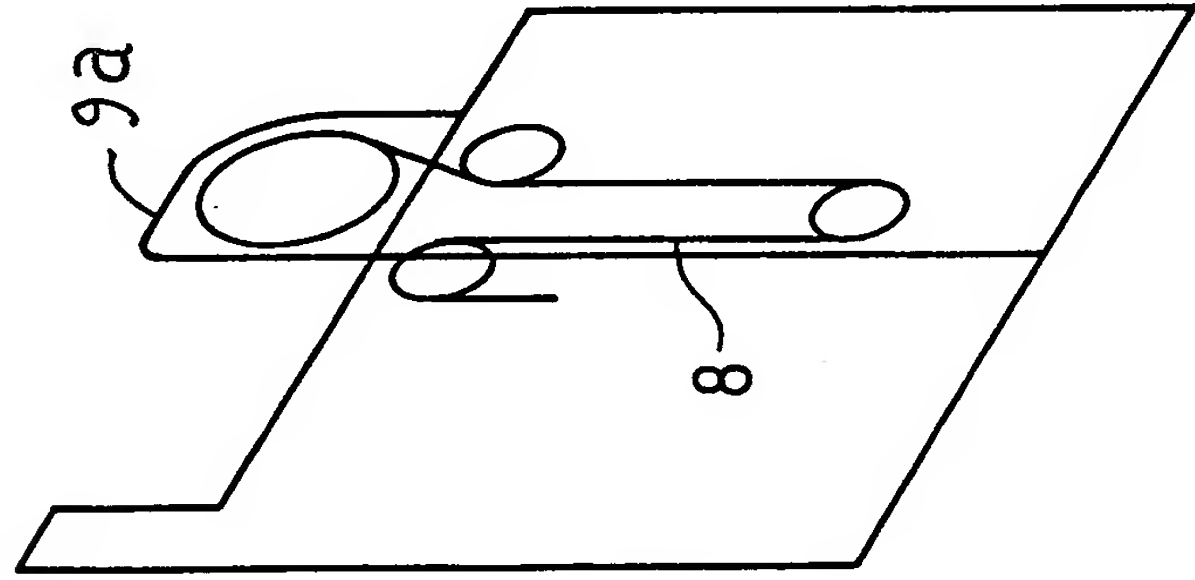


FIG.12 (b)



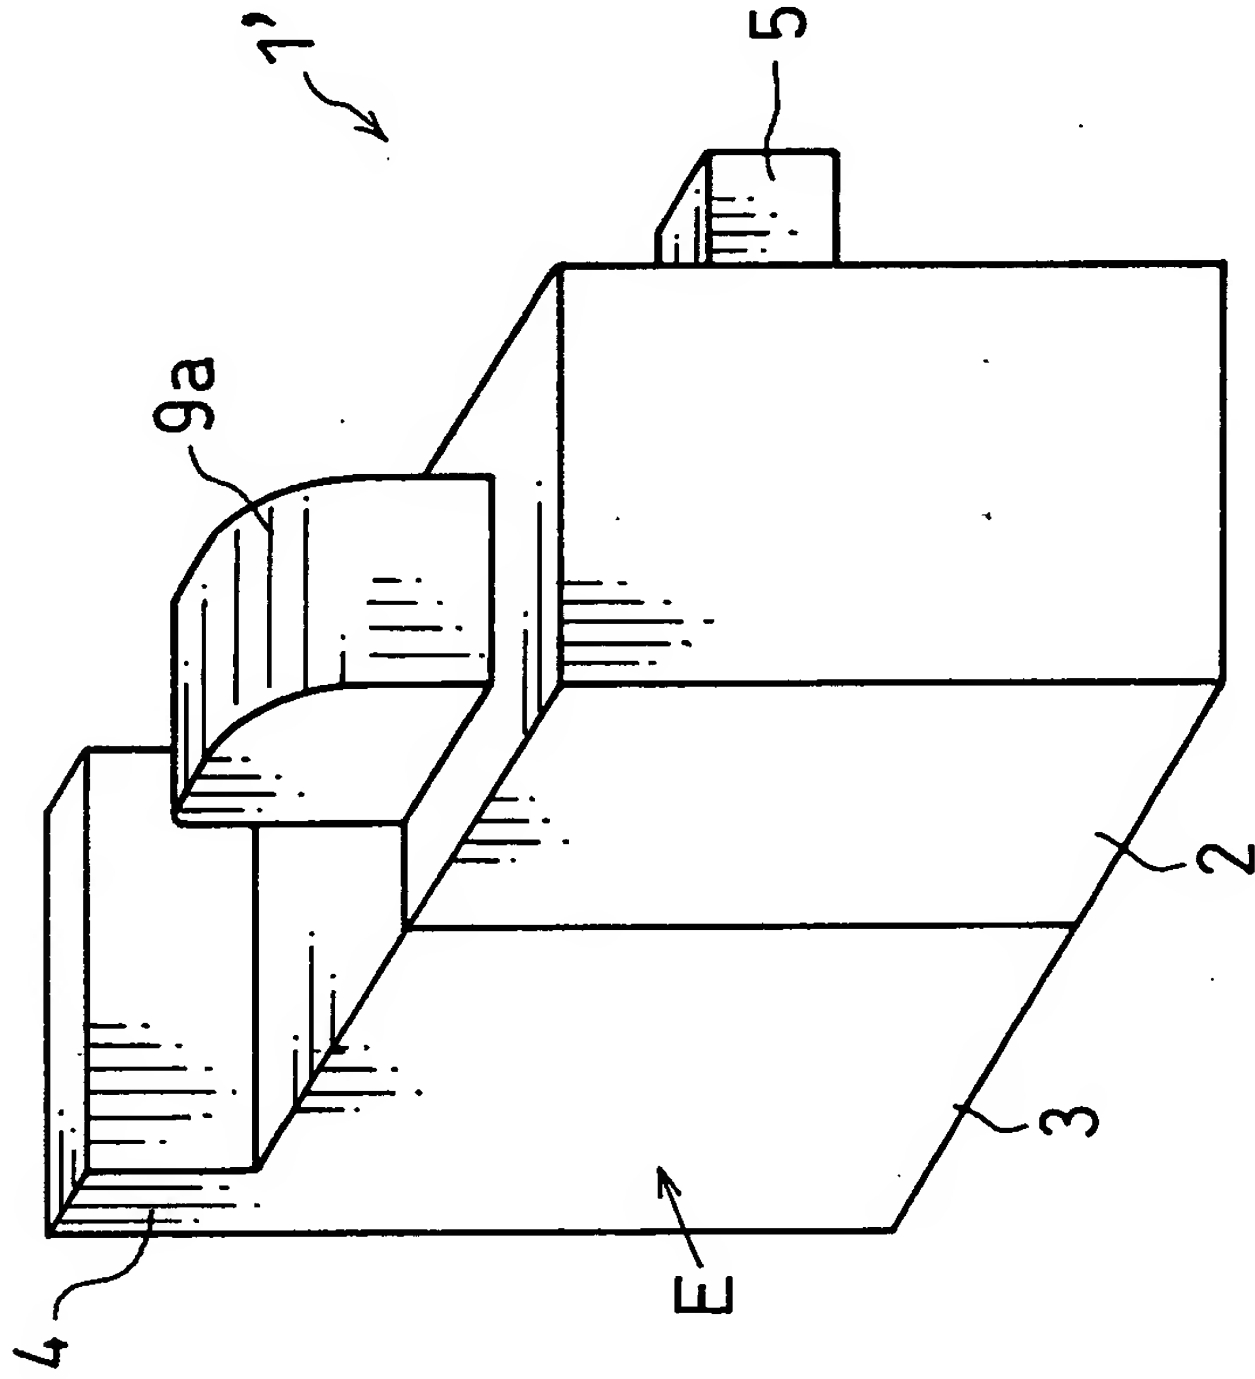


FIG. 33
(PRIOR ART)

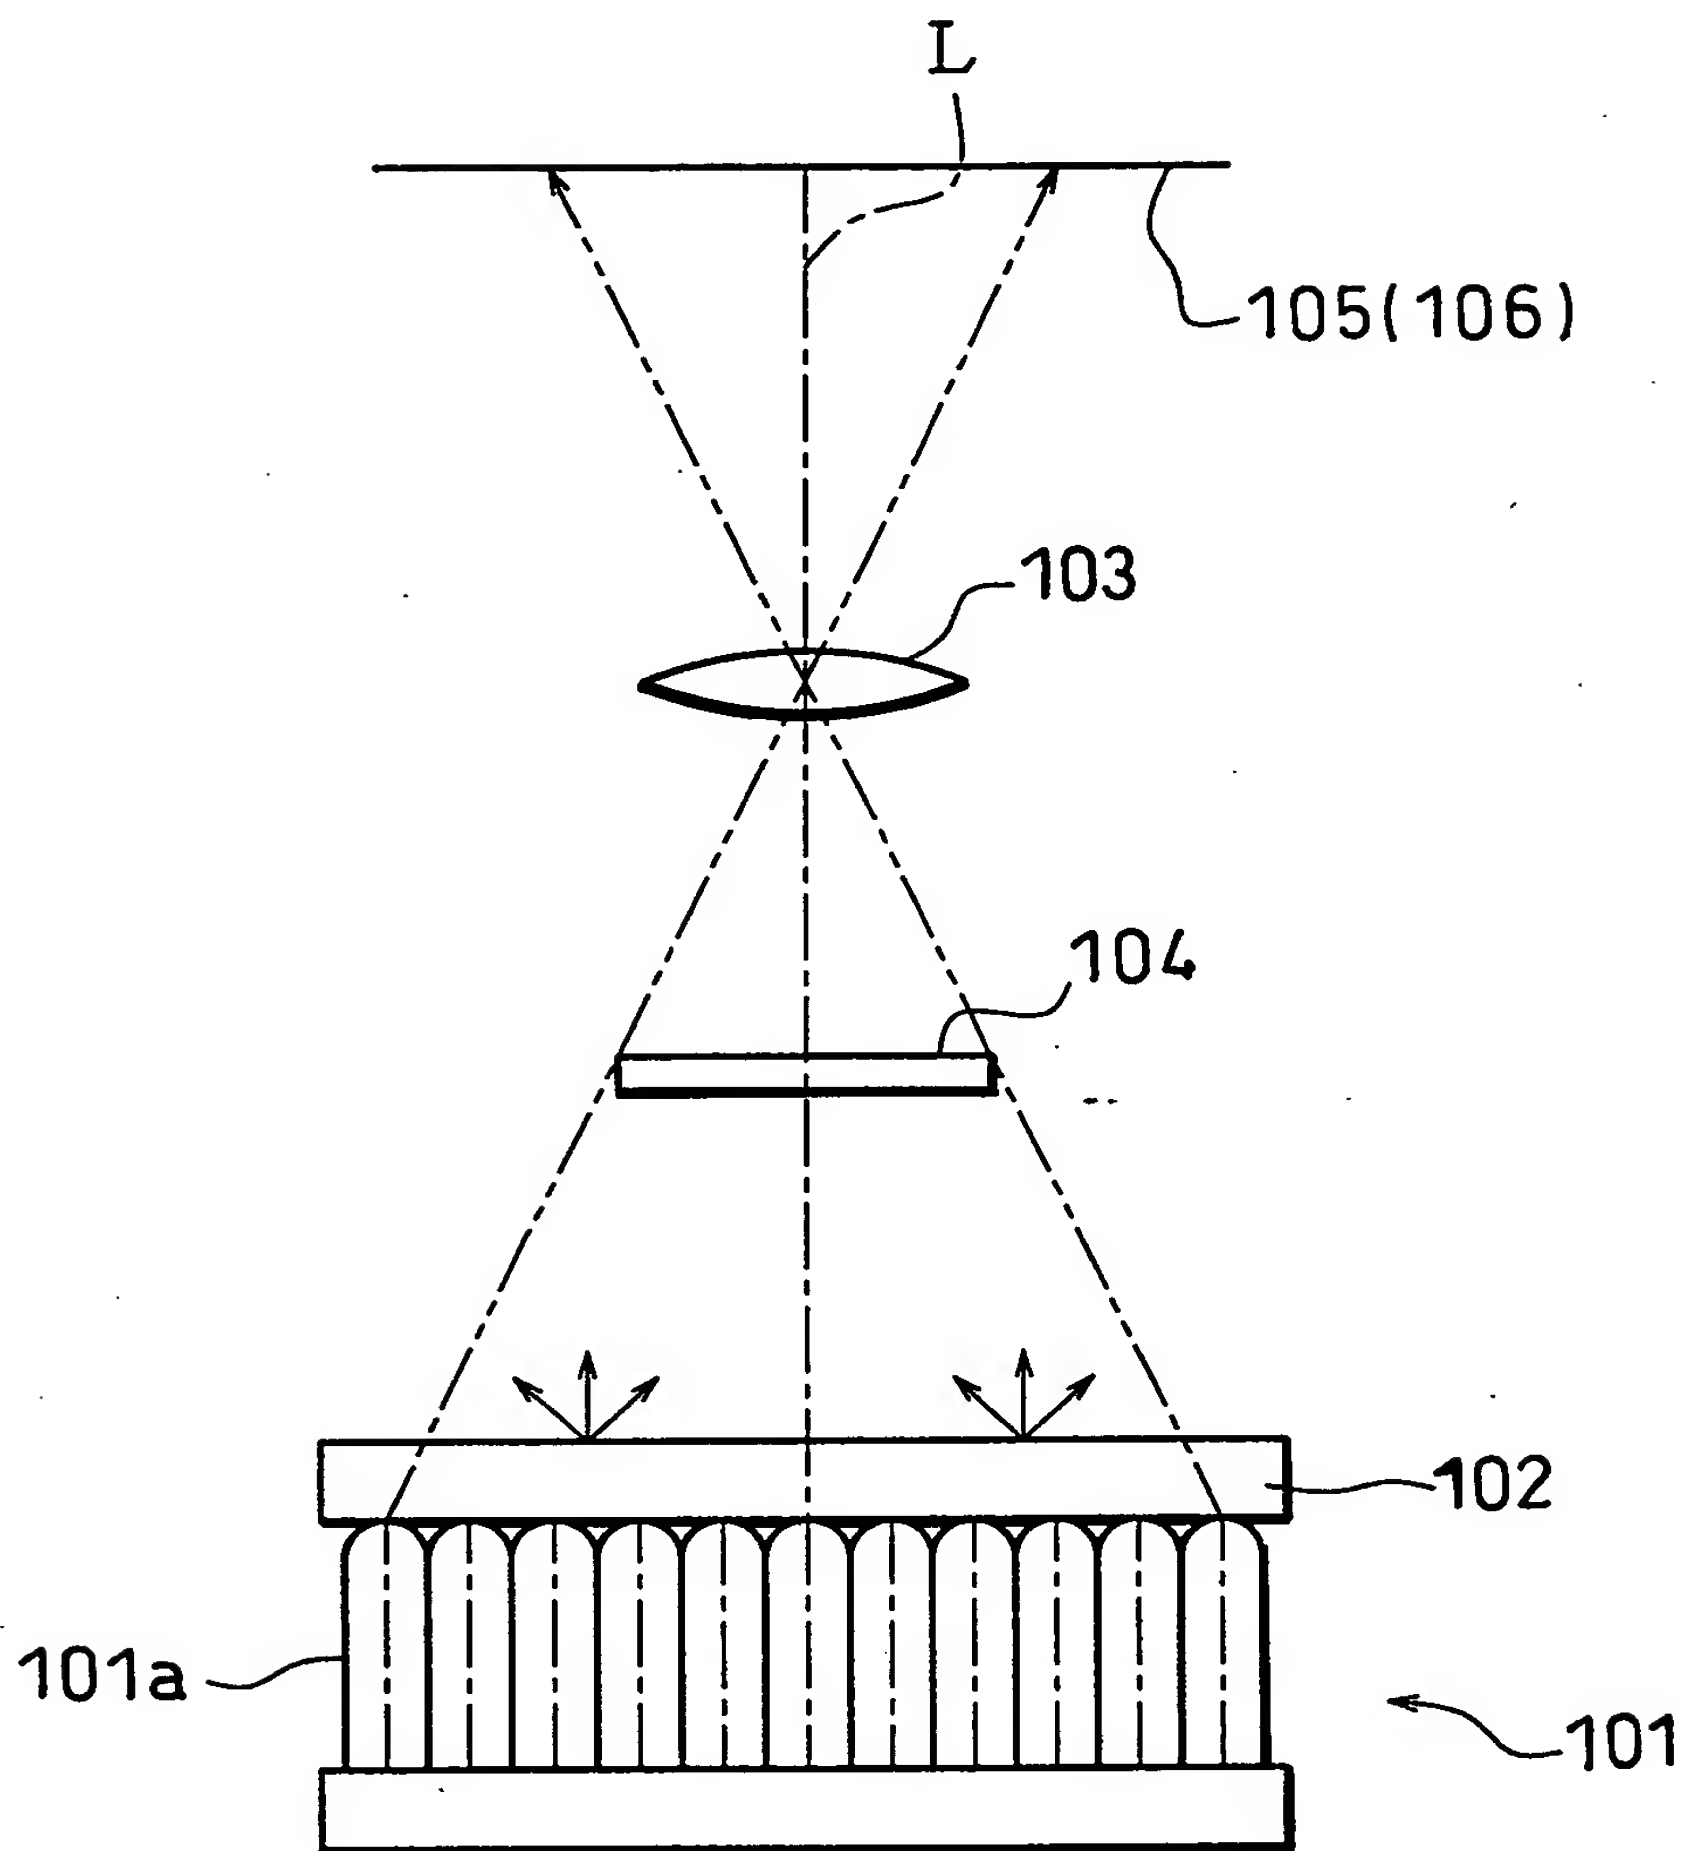

40054304-01203

FIG. 34
(PRIOR ART)

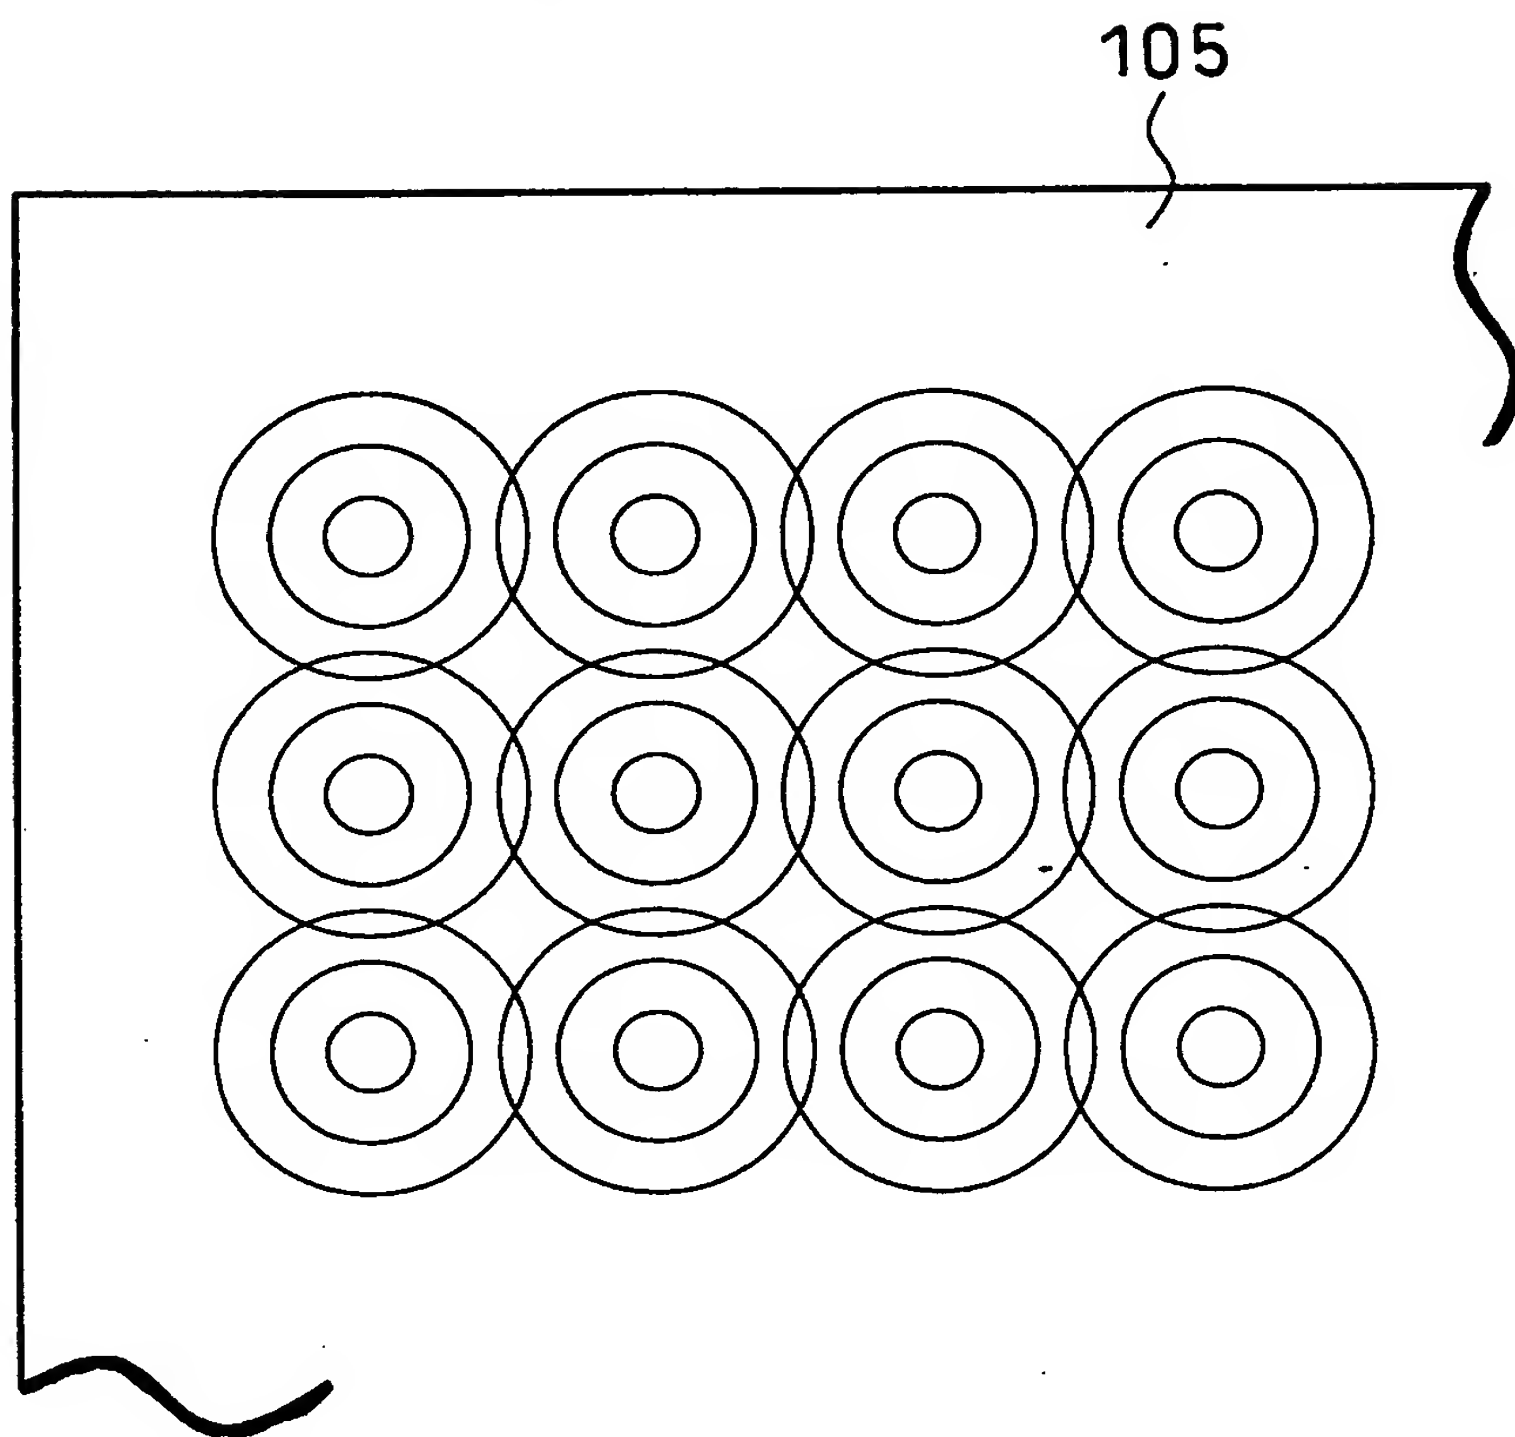

1054304-0302

FIG.11 (b)

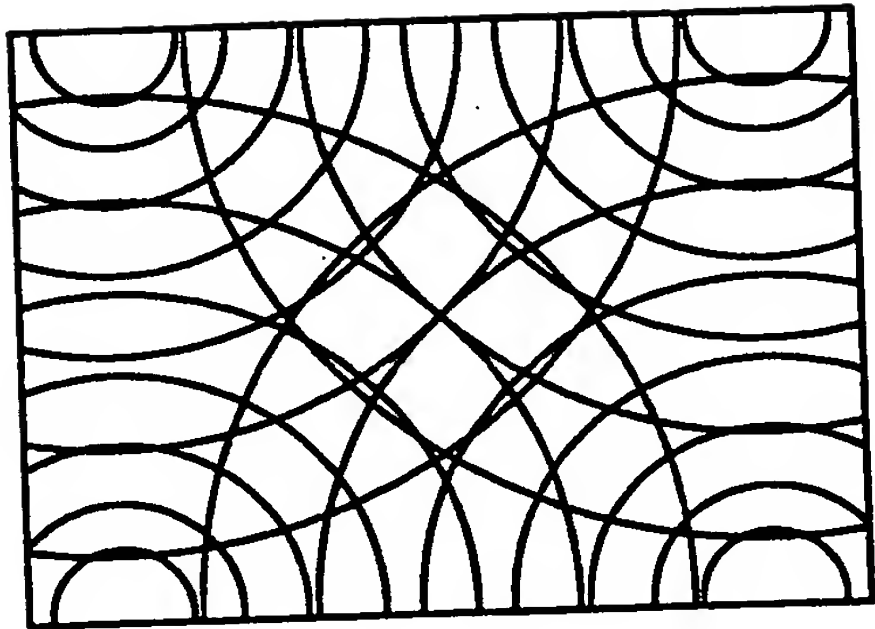


FIG.11 (a)

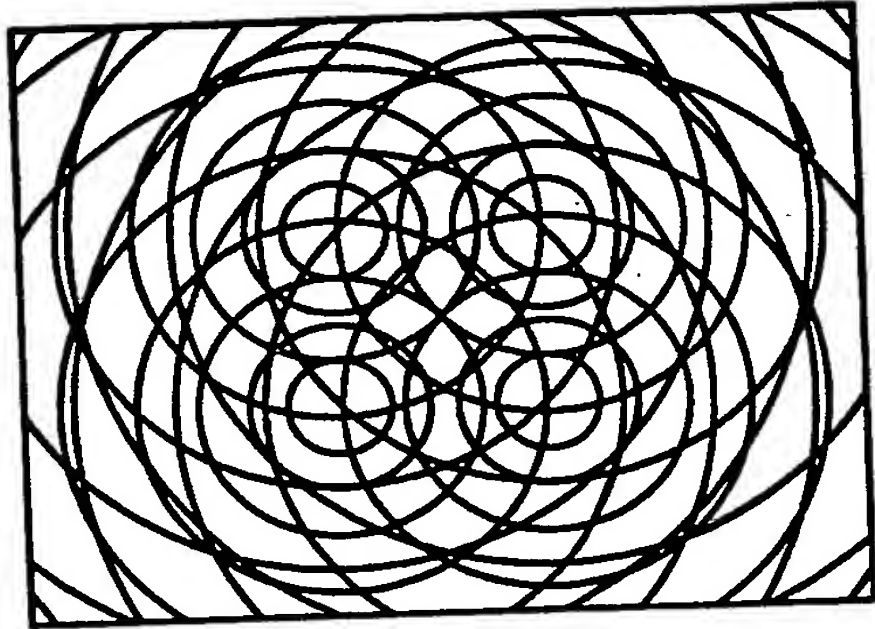


FIG.12(a)

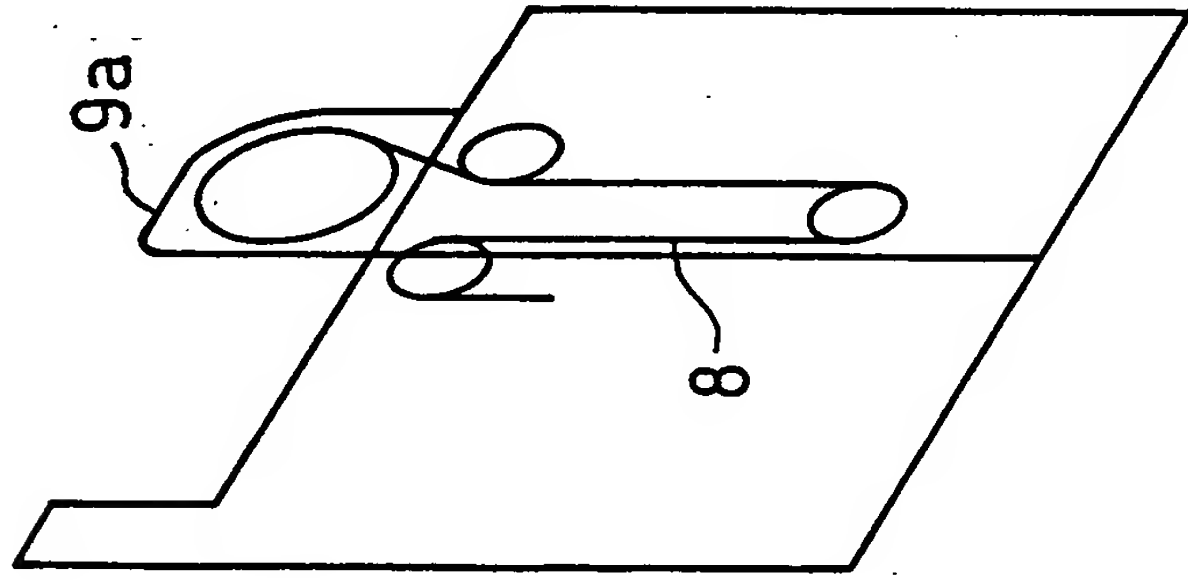


FIG.12(b)



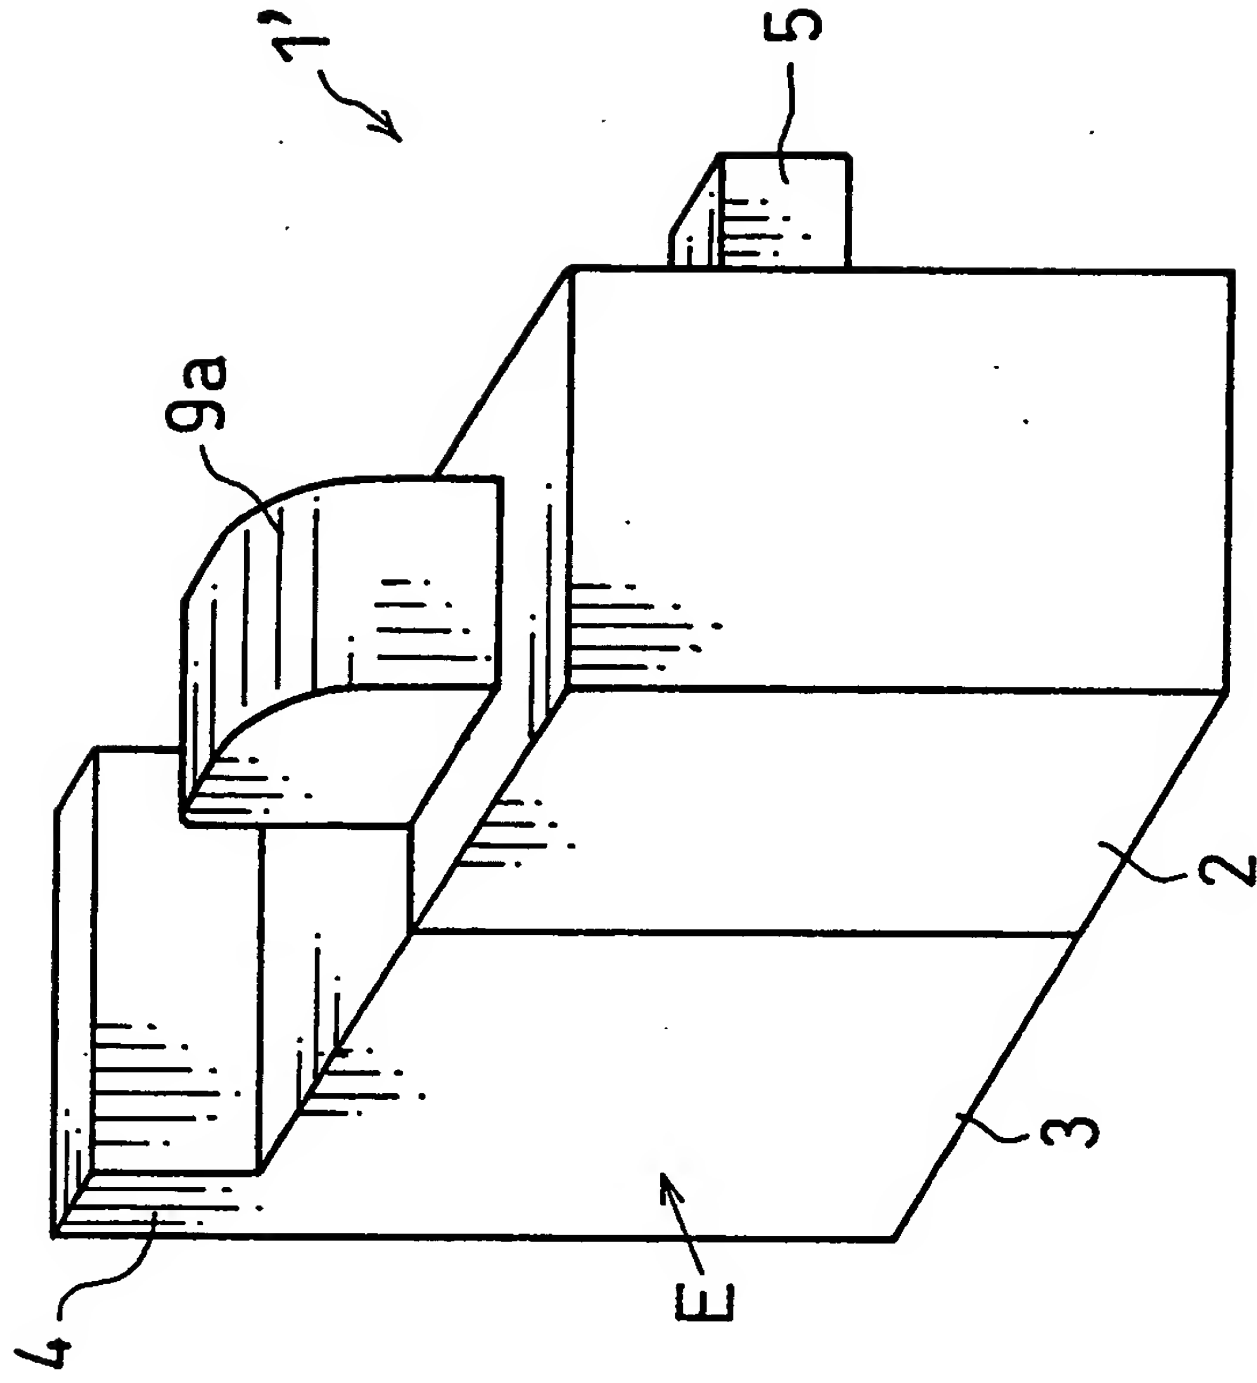


FIG. 34
(PRIOR ART)

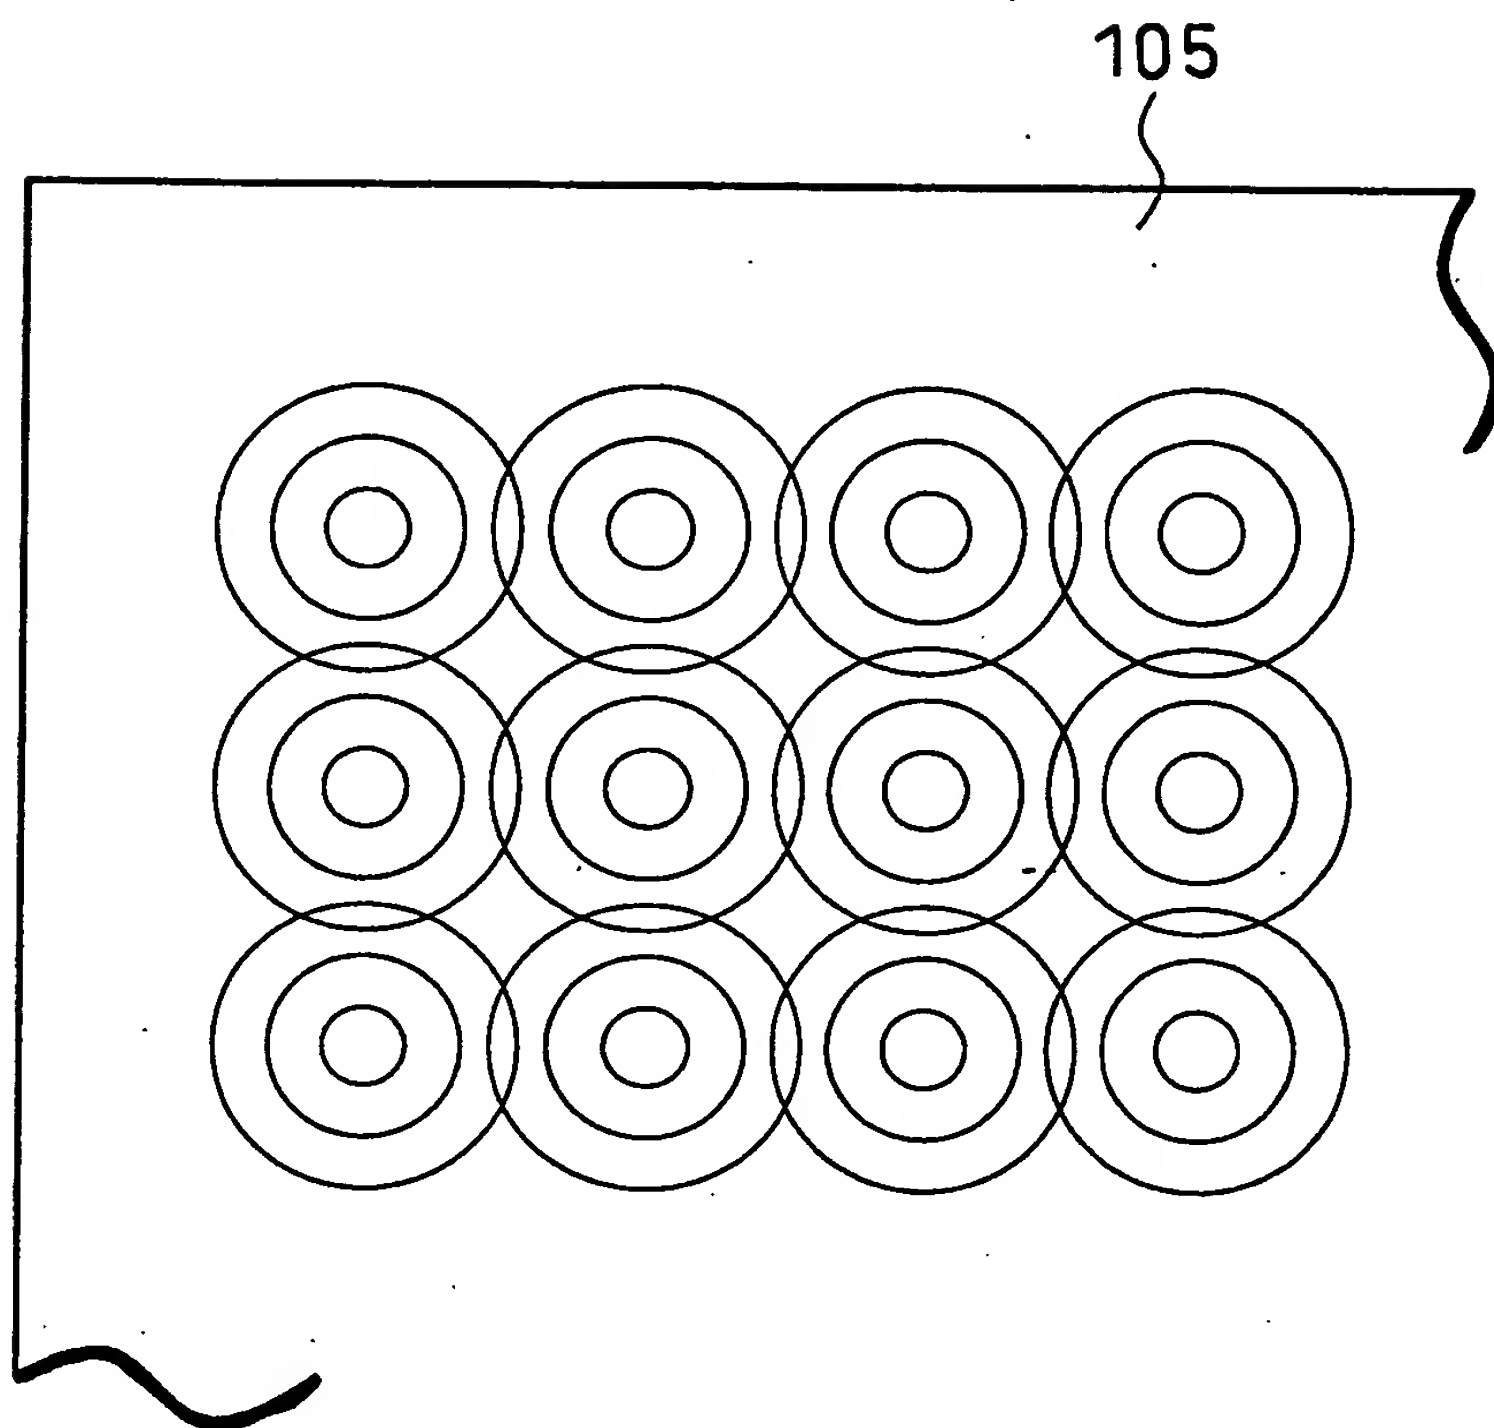

4054904-0103

FIG. 33
(PRIOR ART)

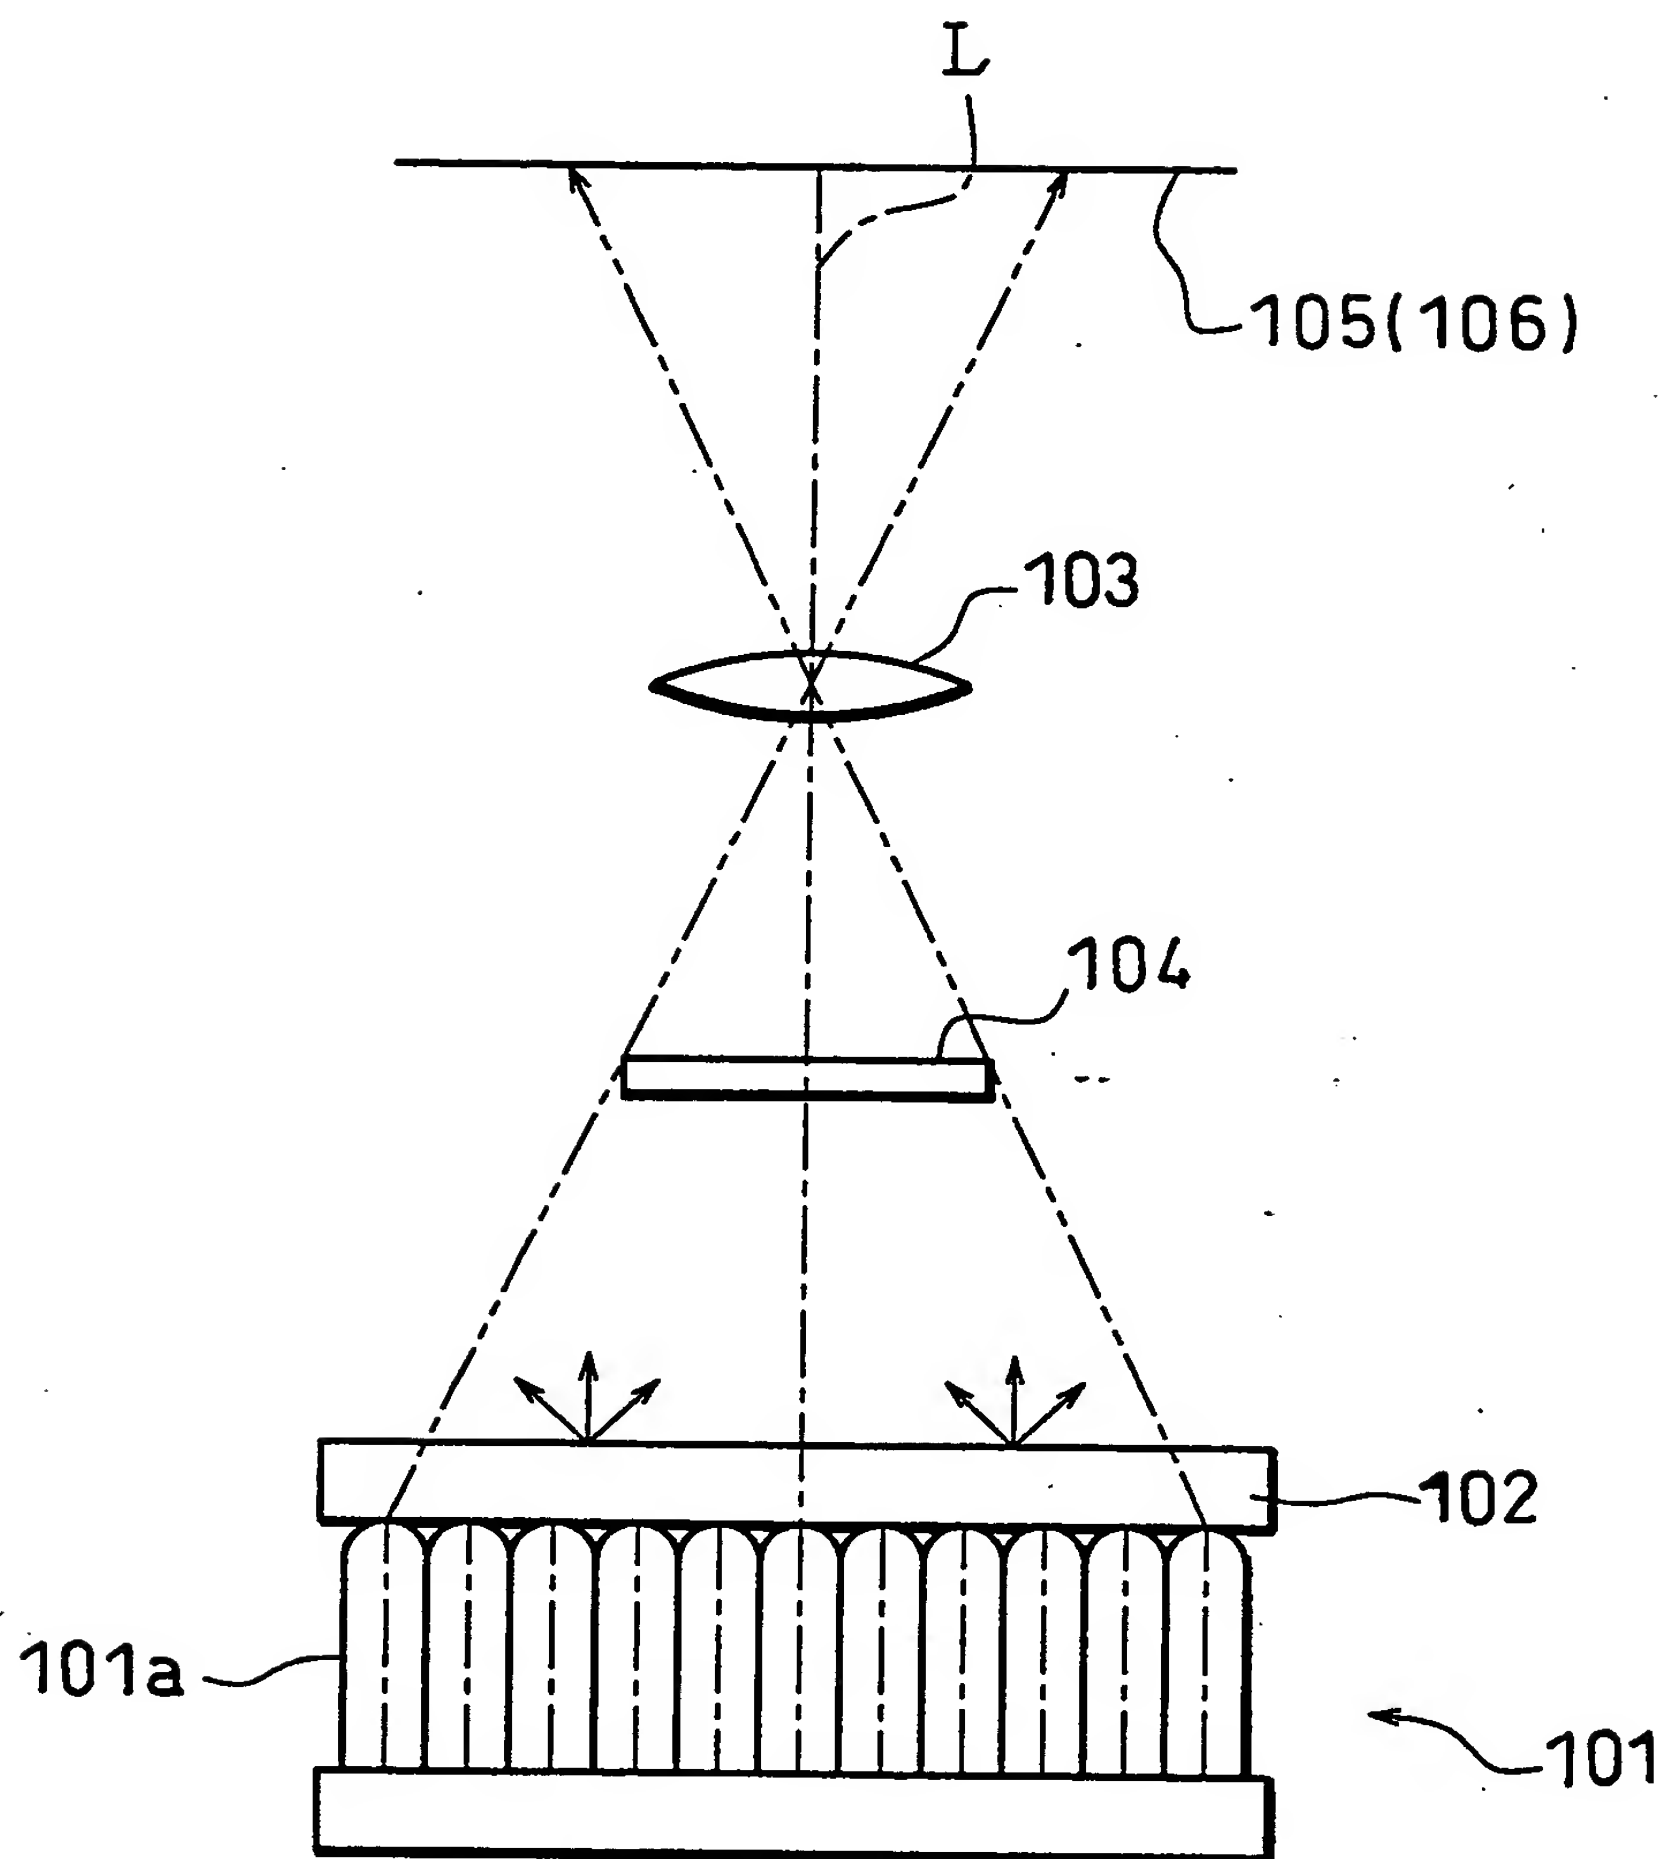

4054904-012503